

AHK 36e

NEW



Technical Data

Permissible gross vehicle weight [t]	3.5
Max. payload [kg]	1,000 (opt. 2,000)
Max. extension length [m]	34.0 (opt. 36.0)
Working height up to jib [m]	22.7
Jib extendable [m]	4.9 / 8.0 / 11.1 (opt. 13.1)
Jib payload [kg]	2,000 / 1,000 / 800 / 500 / (250)
Boom angle [degrees]	85
Jib angle [degrees]	162
Pivoting range [degrees]	endless
Hook speed [m/min]	100
Range for crane operation at 250 kg [m]	23.1 (23,5)
Range for crane operation at 500 kg [m]	16.6
Range for crane operation at 800 kg [m]	12.9
Range for crane operation at 1 t [m]	10.0
Range for crane operation at 2 t [m]	5.4
Range for platform operation at 250 kg [m]	15.8
Range for platform operation at 100 kg [m]	18.8
Working height in platform operation max. [m]	29.0
Drive	230 V with battery





The AHK 36e is now optionally available with extended battery capacity, optimized drive concept with higher efficiency and an electrically driven winch. Thus the crane requires significantly less energy and even recovers it when the load is lowered via the rope winch. The energy generated by the winch motor is fed directly into the battery. The electric winch also delivers impressive rope speeds of up to 100 m/min, making sustainable lifting of loads even faster and more efficient.

Böcker
MY WAY TO THE TOP


Preliminary data, subject to change. All rights reserved for changes. All specified values are maximum values.

Working range crane operation

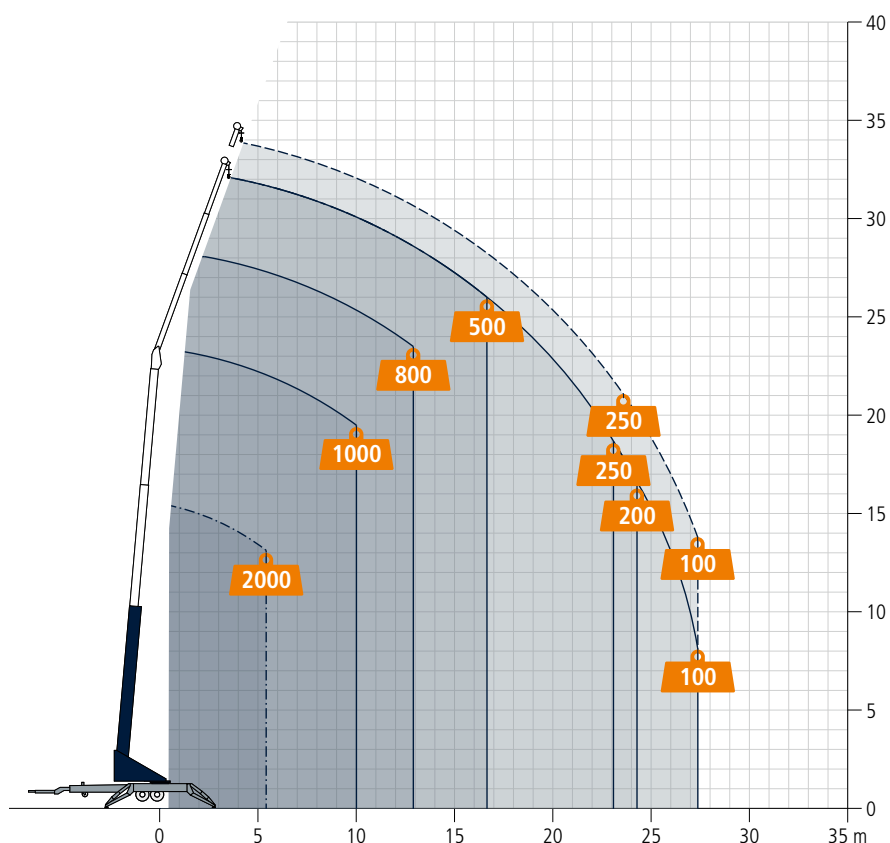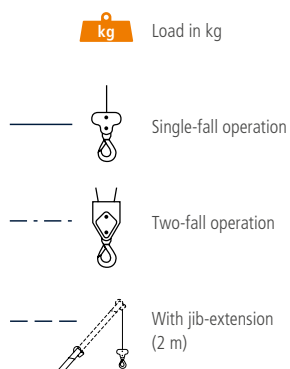

Working range platform operation

Rotating basket PK 250-D

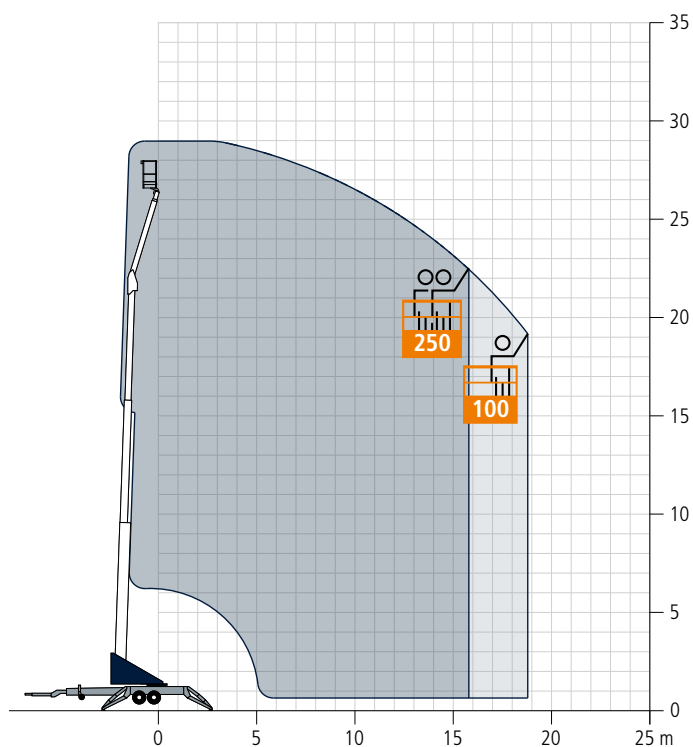

All weights are in kg.
Dimensions can fluctuate slightly.

Böcker

www.boecker.de

Böcker Maschinenwerke GmbH

Lippest. 69-73
59368 Werne

Fon +49 2389 79890
info@boecker.de

Technical_Information_AHK_36e_EN_0224